

06-01-00

A

PATENT APPLICATION TRANSMITTAL LETTER

(Large Entity)

Docket No.

99EC035/77526

1c490 U.S. PTO



05/31/00

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Eric James

For: **SYSTEM AND METHOD FOR AUTOMATICALLY MONITORING AND DISPLAYING ENTITY PHYSICAL LOCATION INFORMATION IN A CALL CENTER**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EL045291127US
- ☒ Spec. 25 pages - 5 sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: Assignment Document with PTO/1595 and authorization to charge Dep. Account for Fee

jc515 U.S. PTO
09/584306
05/31/00

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	52	- 20 =	32	x \$18.00	\$576.00
Indep. Claims	3	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
TOTAL FILING FEE					\$1,266.00

- ☐ A check in the amount of to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 03-2470 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$1,266.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: May 31, 2000

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231, on this date.

Date 5/31/00


Express Mail Label No.

EL045291127US

cc:

Indira Saladi
Signature

Indira Saladi, Reg. No. 45,759

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10) Applicant(s): Eric James			Docket No. 99EC03577526
Serial No.	Filing Date May 31, 2000	Examiner	Group Art Unit
Invention: SYSTEM AND METHOD FOR AUTOMATICALLY MONITORING AND DISPLAYING ENTITY PHYSICAL LOCATION INFORMATION IN A CALL CENTER			
<p>I hereby certify that this <u>Patent application papers</u> <i>(Identify type of correspondence)</i></p> <p>is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on <u>May 31, 2000</u> <i>(Date)</i></p> <p style="text-align: right;"><u>Connie Jacox</u> <i>(Typed or Printed Name of Person Mailing Correspondence)</i></p> <p style="text-align: right;"><u></u> <i>(Signature of Person Mailing Correspondence)</i></p> <p style="text-align: right;"><u>EL045291127US</u> <i>("Express Mail" Mailing Label Number)</i></p>			
<p style="text-align: center;">Note: Each paper must have its own certificate of mailing.</p>			

5 SYSTEM AND METHOD OF CHANGING ENTITY CONFIGURATION
 INFORMATION WHILE AUTOMATICALLY MONITORING AND
 DISPLAYING SUCH INFORMATION IN A CALL CENTER

Field of the Invention

 This invention relates to communications systems
and, more particularly, to call centers.

10

Background of the Invention

 Communications systems with call centers are known.
Such systems are typically used as a means of
15 distributing telephone calls among a group of call
center agents of an organization. As calls are directed
to the organization from the public switch telephone
network (PSTN), the communications system directs the
calls to its call center agents based upon some
20 algorithm. For example, a communications system such as
an automatic call distributor (ACD), a public branch
exchange (PBX), or a central office exchange service
(centrex) may recognize a call target based upon an
identity of an incoming trunk line and route the call
25 accordingly.

 In call centers where many calls are received and
handled by many call center agents, the call center may
contain a large number of agents. Agents are
responsible for servicing customers. Call center agents
30 may provide product support, take sales orders, and
handle inquiries. In essence, the call center agents
provide the wide array of services that the companies
that use them require. Thus, the effectiveness and

I hereby certify that this paper is be-
ing deposited with the United States Postal
Service as Express Mail in an envelope ad-
dressed to: Assistant Commissioner for Pat-
ents, Washington, D.C. 20231, on this date.

Date 5/31/00
Express Mail Label No.

E104529112745

efficiency of a call center depends on the call center agents. Call center supervisors manage call center agents, including scheduling their tasks and duties, and are responsible for monitoring their whereabouts.

5 To manage the call center efficiently, it is important for a call center supervisor to have ready access to the location of the call center agents. Currently, monitoring of the call center is performed manually by a paper or electronic floor plan image of
10 the call center depicting the consoles that the agents sit at. To monitor the whereabouts of agents, tags representing agents are placed on the floor plan in the console position occupied by the agent.

Such manual solutions may be inaccurate and may
15 misrepresent an agent's physical location. For example, many call centers operate in hotdesking mode where agents sit at different seats according to availability and preference on a shift by shift basis. Thus, the floor plan may not represent the current agent and
20 console locations. When an agent moves from one console to another, the call center supervisor must make note of the change by moving the tag representing the agent either on the paper or electronic floor plan. This requires the supervisor to constantly update the floor
25 plan. If the supervisor loses track of agent positions, then some consoles identified as occupied may be mismarked. By not adequately tracking agents or consoles, the call center becomes underutilized and inefficient. Also, by being unaware of agents'

whereabouts, the call center supervisor is unable to estimate the call center's capability.

Further, even if the supervisor where to maintain an accurate floor plan, the supervisor is not able to
5 reassign agents and make other configuration changes from the supervisor's desk. The supervisor must physically walk over to an agent's console and re-assign or re-configure the agent's console. Having the supervisor walk to each agent's console and perform the
10 necessary changes is time consuming and inefficient.

The existing method of monitoring physical locations of call center agents and consoles of communications systems requires the supervisor to manually track agents and consoles. As a consequence,
15 many agents may be undetected or many unused consoles may be unused, and thereby, the quality of service provided by the call center may degrade. Further, the supervisor must physically walk to each and every console to perform the necessary changes to console
20 configuration so that the call center is optimally performing. Accordingly, a need exists for a better way of changing agent and console information while automatically monitoring and displaying such information in a call center.

25

Summary

The present invention, accordingly, provides a system and method of changing entity configuration information that overcomes or reduces the
30 disadvantageous and limitations associated with prior

agent monitoring methods and systems. Illustrated embodiments reduce the disadvantage of manually tracking agents and consoles in a call center by automatically monitoring entities in a call center, selecting an

- 5 entity in the call center, and modifying configuration information of the selected entity. An electronic floor plan that depicts the locations of the entities, displays the entity configuration information and is automatically updated when changes occur is disclosed.
- 10 In an exemplary embodiment, call center supervisors are able to view accurate physical location information for call center agents and consoles on a two-dimensional or three-dimensional electronic floor plan. Further, the call center supervisors are able to change entity
- 15 configuration information by selecting an entity from the electronic floor plan.

Brief Description of the Drawings

- The foregoing advantageous features of the
- 20 invention will be explained in greater detail and others will be made apparent from the detailed description of the preferred embodiment of the present invention which is given with reference to the several figures of the drawing, in which:

- 25 FIG. 1 is a simplified functional block diagram of the automatic call distribution system in accordance with an illustrated embodiment of the invention;

FIG. 2 is a simplified flow chart of the method used by the system of FIG. 1;

FIG. 3 is a simplified flow chart of an embodiment of the method disclosed in FIG. 2;

FIG. 4 is a diagram depicting a two-dimensional electronic floor plan used by the system of FIG. 1; and

5 FIG. 5 is a diagram depicting a three-dimensional electronic floor plan used by the system of FIG. 1.

Detailed Description

Shown in Fig. 1 is a communications system 100
10 shown in a context of use. The communications system 100 functions to selectively and automatically interconnect a caller 20 calling through the public switched telephone network (PSTN) 10 to one of a number of agent telephones 1-N (3, 6, or 11) where N may be a
15 preselected number greater than one. Although the communications system 100 is described with reference to an automatic call distributor (ACD), a PBX or centrex system may also be used in place of the ACD. Further, implementing a call center with any of these switching
20 systems is considered to be equivalent and variations will not be discussed further. For a more detailed discussion of automatic call distributors, reference may be made to U.S. Pat. No. 5,268,903 to Jones et al. entitled "Multichannel Telephonic Switching Network With
25 Different Signaling Formats and Connect/PBX Treatment Selectable For Each Channel", issued December 7, 1993; U.S. Pat. No. 5,140,611 to Jones et al. entitled "Pulse Modulated Self-Clocking and Self-Synchronizing Data Transmission and Method for a Telephonic Communication
30 Switching System", issued Aug. 8, 1992 and U.S. Pat. No.

5,127,004 to Lenihan et al. entitled "Tone and Announcement Message Code Generator for a Telephonic Switching System and Method", issued Jun. 30, 1992.

Further, although the present invention is
5 described in reference to the PSTN 10, a packet-switched voice network or other equivalent network where voice calls are relayed to a call center may be used. For example, where voice calls are transmitted over a global network, such as the Internet using Internet Protocol
10 (IP) a packet-switched communications network may be used to implement the system of transmitting the call.

In addition to the agent telephone (3, 6, or 11), the agent has a computer workstation consisting of a terminal and an input device, such as a keyboard or
15 mouse. The agent telephone (3, 6, or 11), terminal and input device are collectively termed a "console." A console is one type of physical entity in a call center. The term entity is used to refer to physical objects in a call center. For example, it may refer to an agent,
20 console, supervisor, printer, or facsimile. In the illustrated embodiment, the term entity refers to a call center agent or a call center console; however, other physical objects may be monitored and displayed as described by the present invention.

25 In addition to the agent telephones (3, 6, 11), the ACD 9 also interfaces with a server computer 8. The server 8 functions to provide agent workstations (2, 5, 12) and supervisor workstation 14 with information from the ACD 9 and a database 7. For example, as calls are
30 received from the PSTN 10, call associated information

(e.g., ANI, DNIS, etc.) may be delivered to the agent along with the call. The database 7 maintains performance statistics, customer information, and dial lists of the ACD 9 system. Server computer 8 may relay statistics and performance information maintained in database 7 to the supervisor workstation 14.

In accordance with an embodiment of the present invention, a method for changing entity configuration information in a call center comprising the steps of:

- 10 (a) automatically monitoring entities in a call center,
- (b) selecting an entity in the call center, and (c)
- modifying configuration information of the selected entity. The step of automatically monitoring entities is further described below. The step of selecting an
- 15 entity functions to provide the supervisor with a way to focus on an entity in the call center without having to physically walk over to the entity. In an exemplary embodiment, selecting an entity is accomplished by placing a selection device, such as a mouse, over a
- 20 pictorial image of the entity and double clicking on the image. Selection may also be performed by the use of a pen-based or voice recognition device that performs the same function. The step of modifying entity configuration information functions to allow the
- 25 supervisor to change parameters or data associated with a specific entity without having to walk over to the entity and make those changes. This may be accomplished by typing in configuration information via a keyboard or via selection of configuration parameters by the mouse.

In an exemplary embodiment, entity configuration information includes data such as staff ID, class of service, agent group, directory number, supervisor staff ID, schedule adherence threshold group, secondary agent group, agent information group, message queue, major class, and name. For example, agent Bob having a staff ID of 1111 sitting at console 1234 would have the following related configuration information.

Configuration Name	Description	Value
staff ID	Sign-in Number associated with a Person	1111
class of service	AGENT, SUPV, MASTER, MAINT, VRU, VMAIL, FAX, PHONE, or TRUNK	AGENT
agent group	Sales, Service, Management, etc.	Widget Sales Telephone Lines, 1-200
directory number	Staff member's phone extension	5455
supervisor staff ID	Supervisor for Staff	Carol Smith
schedule adherence threshold group	Associates Staff with certain thresholds	1
secondary agent group	Sales, Service, Management, etc.	Gizmo Sales Telephone Lines, 1-220
agent information group	Collection of organized agents, LINRs, or VRUs	
message queue	ACD mail message queue to which agent is assigned	0
major class	Type of staff, e.g. AGENT, SUPV, MASTER, and MAINT	AGENT
name	Name of staff	Bob Jones
console	Number of physical console unit	1234

10

The step of automatically monitoring entities functions to provide an updated electronic floor plan of the call center to the supervisor of the call center.

The step further comprises the steps of: (a) monitoring physical location information of entities to provide an electronic floor plan (see block 22 of FIG. 2), and (b) updating the electronic floor plan to provide and

5 reflect a change in physical location information of the entities (see block 24). Physical location information includes x, y, and z Cartesian coordinates, latitude and longitude meridians, or radius vector and angle. As an example, referring now to FIG. 4, console 60 may be
10 referred to by its x, y, and z Cartesian coordinates as console (2, 2, 4). Further, the Cartesian coordinates are used to graphically describe the location of console 60 on a two-dimensional user interface.

The step of monitoring physical location
15 information of entities functions to provide an automatic trigger for changes in the physical location information. Monitoring means detecting physical location information for each entity in the system and noting changes when an entity moves. The step of
20 updating an electronic floor plan means providing a call center supervisor with current entity configuration information regarding the entity within call center. Updating an electronic floor plan requires retrieving the recorded physical location information, translating
25 the recorded physical location information into graphical form, and drawing the graphical form on an electronic floor plan.

In one embodiment the physical location information is stored in the database 7 without meaning. The
30 application that uses the physical location information

dictates the meaning of the coordinates. For example, in a VRML representation of the call center, the physical location information is represented in Cartesian x, y, z coordinates. A call center console
5 projected onto a 2-dimensional device in the direction of the positive z axis has a positive x axis to the right and a positive y axis up.

Referring now to FIG. 3, as an application session (see block 30) begins on the supervisor workstation 14,
10 the supervisor workstation 14 connects to the server computer 8 (see block 1). In an alternative embodiment, an application session may begin by connecting directly to the ACD 9. Next, entity objects are allocated and initialized to produce defined versions on the
15 supervisor workstation 14 (see block 34). This step makes memory available on the supervisor workstation 14 for the physical location information of the entities in the call center.

Further, an event handler routine is initiated to
20 execute whenever agent physical location information is changed (see block 36). The event handler runs in the background on the supervisor workstation 14 and is triggered by a change in x, y, z physical location information. If a change does occur, then the event
25 handler executes software to update the electronic floor plan (see blocks 38-42).

When a new entity or an existing entity is modified (see block 44), the new x, y, z physical location information is updated in the server computer 8 (see
30 block 46). For example, when an agent moves from

console 51 to console 52, the agent logs off console 51 and logs on to console 52. Thus, the agent's physical location has changed from (0, 3, 4) to (1, 3, 4). In one embodiment, the new physical location information (1, 3, 4) is stored in the server computer 8. Then, the new x, y, z physical location information is copied to the database 7 (see block 48). In the above example, the new physical location information for the agent sitting at console 52 is (1, 3, 4) and is stored in the database 7.

In one embodiment, an application running on the supervisor workstation 14 may have a look-up table that keeps track of relationships between agents and consoles. In such an embodiment, the application running on the supervisor workstation would copy the physical location information from the server computer 8 or from the database 7 and maintain a look-up table of agents and consoles.

After the change is made in the database, Entity RTEvent Handler is triggered (see block 50) to perform an update of the electronic floor plan (blocks 38-42). Triggering or raising RTEvent for the new physical location information (see block 50) requires sending a signal to inform RTEvent that a change has occurred. When RTEvent receives the signal, it takes specified actions, namely updating the electronic floor plan (see blocks 38-42).

In an alternative embodiment, the new physical location information is compared with the physical location information in the database 7 before RTEvent

Handler was triggered. If the two are the same, then RTEvent Handler is not triggered. For example, the supervisor may delete an agent from the system and then immediately add the same agent to the same console. In
5 such a situation, there is no need to redraw the electronic floor plan to reflect the change.

Updating of the electronic floor plan is performed by reading the recorded physical location information, translating the recorded physical location information
10 to graphical form, and drawing the graphical form on the electronic floor plan. Reading the recorded physical location information occurs when RTEvent is triggered (see block 36). Translating the recorded physical location information occurs by first verifying that the
15 information contains x, y, z Cartesian coordinates (see block 38). If it does not, then the entity is placed in a list of entities with no location and displayed on the electronic floor plan as not having a location (see block 40). If the information contains x, y, z
20 information, then the electronic floor plan is drawn to reflect this change (see block 42). In an exemplary embodiment, a symbol representing an agent is placed at the console position that the agent is sitting at. For example, in FIG. 4, a graphical symbol of a man in a
25 circle is used to depict the agent's occupied position. However, the electronic floor plan may be of any form reflecting the physical location of entities in the call center.

Under an illustrated embodiment, the electronic
30 floor plan may be drawn in a two-dimensional projection

of the call center. Referring now to FIG. 4, each console (51 - 78) is displayed on the floor plan. The background image of the call center is predefined and may be specified as a rectangular floor plan. Further,
5 the agent who is sitting at a specific console is displayed on the electronic floor plan. FIG. 4 is a bitmap image of the floor plan. However, alternative embodiments may include vector or object oriented graphical images of the floor plan.

10 Under another illustrated embodiment, the electronic floor plan may be drawn in a three-dimensional projection of the call center. A three-dimensional floor plan representing a specific call center may be created using virtual reality modeling
15 language (VRML) and JavaScript code. By accessing the physical location information in either the server computer 8 or the database 7, the VRML electronic floor plan is updated with call center agent and console information. The VRML specification provides for taking
20 Cartesian coordinates and performing a visual representation. Referring now to FIG. 5, a VRML image of a call center with six consoles is displayed. Further, the agent who is sitting at a specific console is displayed on the electronic floor plan. Alternative
25 embodiments may include other three-dimensional modeling objects.

In an alternative embodiment, the method may employ learning as a method of increasing the detection of changes in physical location. The method recognizes and
30 learns agent location pattern regularities that appear

over time. For example, agents assigned to consoles (55-60) regularly break for lunch during the noon hour.

The method may recognize this pattern and learn that during such a time, the location of the agent is in the break room. The ability to predict physical location information may allow the call center supervisor to better predict agent absences and more efficiently manage the call center.

At the end of an application session, the physical location information may be copied to the database for use at a future date. Further, the physical location information may be archived so that the call center supervisor may perform historical analysis of the data to determine efficiencies of the call center and more particularly, call center agents.

A specific embodiment of a system and method of monitoring entities according to the present invention has been described for the purpose of illustrating the manner in which the invention is made and used. It should be understood that the implementation of other variations and modifications of the invention and its various aspects will be apparent to one skilled in the art, and that the invention is not limited by the specific embodiments described. Therefore, it is contemplated to cover the present invention, any and all modifications, variations, or equivalents that fall within the true spirit and scope of the basic underlying principles disclosed and claimed herein.

CLAIMS

1. A method of changing entity configuration information in a call center comprising the steps of:
automatically monitoring entities in a call center;
5 selecting an entity in the call center; and
modifying configuration information of the selected entity.
2. The method of changing entity configuration information as in claim 1 wherein the step of
10 automatically monitoring entities further comprises the steps of:
monitoring physical location information of entities to provide an electronic floor plan; and
15 updating the electronic floor plan to provide and reflect a change in physical location information of the entities.
3. The method of changing entity configuration information as in claim 2 wherein physical location
20 information includes Cartesian coordinates, latitude and longitude meridians, and radius vector and angle.
4. The method of changing entity configuration information as in claim 2 wherein entities includes call
25 center agents, consoles, printers, and facsimile machines.
5. The method of changing entity configuration information as in claim 2 wherein the electronic floor
30

plan includes a bit map image, vector graphics, object oriented graphics, and VRML representation of the call center.

5 6. The method of changing entity configuration information as in claim 2 wherein the step of monitoring changes further comprises comparing physical location at a second time with physical location at a first time.

10 7. The method of changing entity configuration information as in claim 2 wherein updating further comprises notifying a supervisor if the physical location information has been changed.

15 8. The method of changing entity configuration information as in claim 2 wherein the step of monitoring physical location information further comprises:
 recording physical location information; and
 retrieving the recorded physical location
20 information.

 9. The method of changing entity configuration information as in claim 8 wherein the physical location information is entered by a call center user.

25 10. The method of changing entity configuration information as in claim 8 wherein the physical location information is entered by a server computer.

11. The method of changing entity configuration information as in claim 8 wherein updating further comprises:

retrieving the recorded physical location
5 information;
translating the recorded physical location information to graphical form; and
drawing the graphical form on the electronic floor plan.

10

12. The method of changing entity configuration information as in claim 11 wherein the recorded physical location information is determined by getting physical location information from a database of call center
15 information.

13. The method of changing entity configuration information as in claim 11 wherein the step of translating includes using a look-up table to create a
20 relationship between physical location information and graphical form.

14. The method of changing entity configuration information as in claim 11 wherein the step of
25 translating further comprises determining whether the recorded physical location information contains proper Cartesian coordinates.

15. The method of changing entity configuration
30 information as in claim 13 wherein proper is information

that can be graphically represented on the electronic floor plan.

16. The method of changing entity configuration
5 information as in claim 13 wherein recorded physical location information that is improper is maintained in a list of entities without physical location information.

17. The method of changing entity configuration
10 information as in claim 11 wherein the step of drawing further comprises the step of placing a graphical image on the electronic floor plan.

18. The method of changing entity configuration
15 information as in claim 17 wherein the step of drawing is performed by using bit map drawing tools to produce a two-dimensional image of the electronic floor plan.

19. The method of changing entity configuration
20 information as in claim 17 wherein the step of drawing is performed by using VRML code to produce a three-dimensional image of the electronic floor plan.

20. The method of changing entity configuration
25 information as in claim 2 wherein the step of monitoring further comprises identifying an entity which has physically moved.

21. The method of changing entity configuration
30 information as in claim 2 wherein the electronic floor

plan is updated with a prediction of physical location information based upon a history of physical location information.

5 22. The method of changing entity configuration information as in claim 2 wherein the physical location information is archived and retrieved for later analysis.

10 23. A system of changing entity configuration in a call center, such system comprising:

means for monitoring physical location information of entities to provide an electronic floor plan; and

15 means for updating the electronic floor plan to provide and reflect the changes in physical location information of the entities.

20 24. The system of changing entity configuration as in claim 23 wherein entities includes call center agents, consoles, printers, and facsimile machines.

25 25. The system of changing entity configuration as in claim 23 wherein the electronic floor plan includes a bit map image, vector graphics, object oriented graphics, and VRML representation of the call center.

30 26. The system of changing entity configuration as in claim 23 further comprising means for comparing physical location at a second time with physical location at a first time.

27. The system of changing entity configuration as in
claim 23 wherein the means for updating further
comprises means for notifying a supervisor if the
5 physical location information has been changed.

28. The system of changing entity configuration as in
claim 23 wherein the means for monitoring physical
location information further comprises:
10 means for recording physical location information;
and
means for retrieving the physical location
information.

29. The system of changing entity configuration as in
claim 28 wherein the physical location information is
entered by a call center user.

30. The system of changing entity configuration as in
20 claim 28 wherein the physical location information is
entered by a server computer.

31. The system of changing entity configuration as in
claim 28 wherein the means for updating further
25 comprises:

means for reading the recorded physical location
information;

means for translating the recorded physical
location information to graphical form; and

means for drawing the graphical form on the electronic floor plan.

32. The system of changing entity configuration as in
5 claim 31 wherein the physical location information is stored in a database of call center information.

33. The system of changing entity configuration as in
10 claim 31 wherein the means for reading further comprises means for retrieving physical location information from a database of call center information.

34. The system of changing entity configuration as in
15 claim 31 wherein the means for translating includes a look-up table of relationships between physical location information and graphical form.

35. The system of changing entity configuration as in
20 claim 31 wherein the means for translating further comprises means for determining whether the recorded physical location information contains proper Cartesian coordinates.

36. The system of changing entity configuration as in
25 claim 34 wherein proper is information that can be graphically represented on the electronic floor plan.

37. The system of changing entity configuration as in claim 34 wherein recorded physical location information

that is improper is maintained in a list of entities without physical location information.

38. The system of changing entity configuration as in
5 claim 34 wherein the means for drawing further comprises means of placing a graphical image on the electronic floor plan.

39. The system of changing entity configuration as in
10 claim 34 wherein the means for drawing includes bit map and VRML drawings tools.

40. The system of changing entity configuration as in
15 claim 23 wherein the means for monitoring further comprises means for identifying an entity which has physically moved.

41. The system of changing entity configuration as in
20 claim 23 further comprising means for predicting physical location information based upon a history of physical location information.

42. The system of changing entity configuration as in
25 claim 23 further comprising means for storing archived physical location information.

43. The system of changing entity configuration as in
30 claim 42 further comprising means for retrieving the archived physical location information.

44. A system of changing entity configuration in a communications system, such system comprising:

an entity monitor which monitors entities for physical location information to provide an electronic floor plan; and

an informer that updates the electronic floor plan to provide and reflect changes in physical location information of the entities.

45. The system of changing entity configuration as in claim 44 wherein the call monitor comprises a programmable computer.

46. The system of changing entity configuration as in claim 44 wherein entities includes call center agents, consoles, printers, and facsimile machines.

47. The system of changing entity configuration as in claim 44 wherein the electronic floor plan includes a bit map image, vector graphics, object oriented graphics, and VRML representation of the call center.

48. The system of changing entity configuration as in claim 44 wherein the entity monitor further comprises an evaluator which compares physical location at a second time with physical location at a first time.

49. The system of changing entity configuration as in claim 44 wherein the informer further comprises a

notifier which alerts a supervisor if the physical location information has changed.

50. The system of changing entity configuration as in claim 44 wherein the entity monitor further comprises:

a recorder for storing physical location information; and

a retriever for getting the stored physical location information.

10

51. The system of changing entity configuration as in claim 50 wherein the informer further comprises:

a reader which retrieves the recorded physical location information;

15 a translator for relating the recorded physical location information to graphical form; and

a drawer which places the graphical form on the electronic floor plan.

20 52. The system of changing entity configuration as in claim 51 wherein the translator includes a look-up table of relationships between physical location information and graphical form.

Abstract

A system and method of changing entity configuration information in a call center is disclosed.

5 By automatically monitoring entities in a call center, selecting an entity in the call center, and modifying configuration information of the selected entity, keeping track of entities in a call center is automated. Agents and consoles are examples of entities monitored

10 in the call center. When agents or consoles change physical location, the electronic floor plan is automatically updated to reflect the new physical location information for the agents and consoles. Further, a supervisor of a call center can change entity

15 configuration information by selecting an entity on the electronic floor plan.

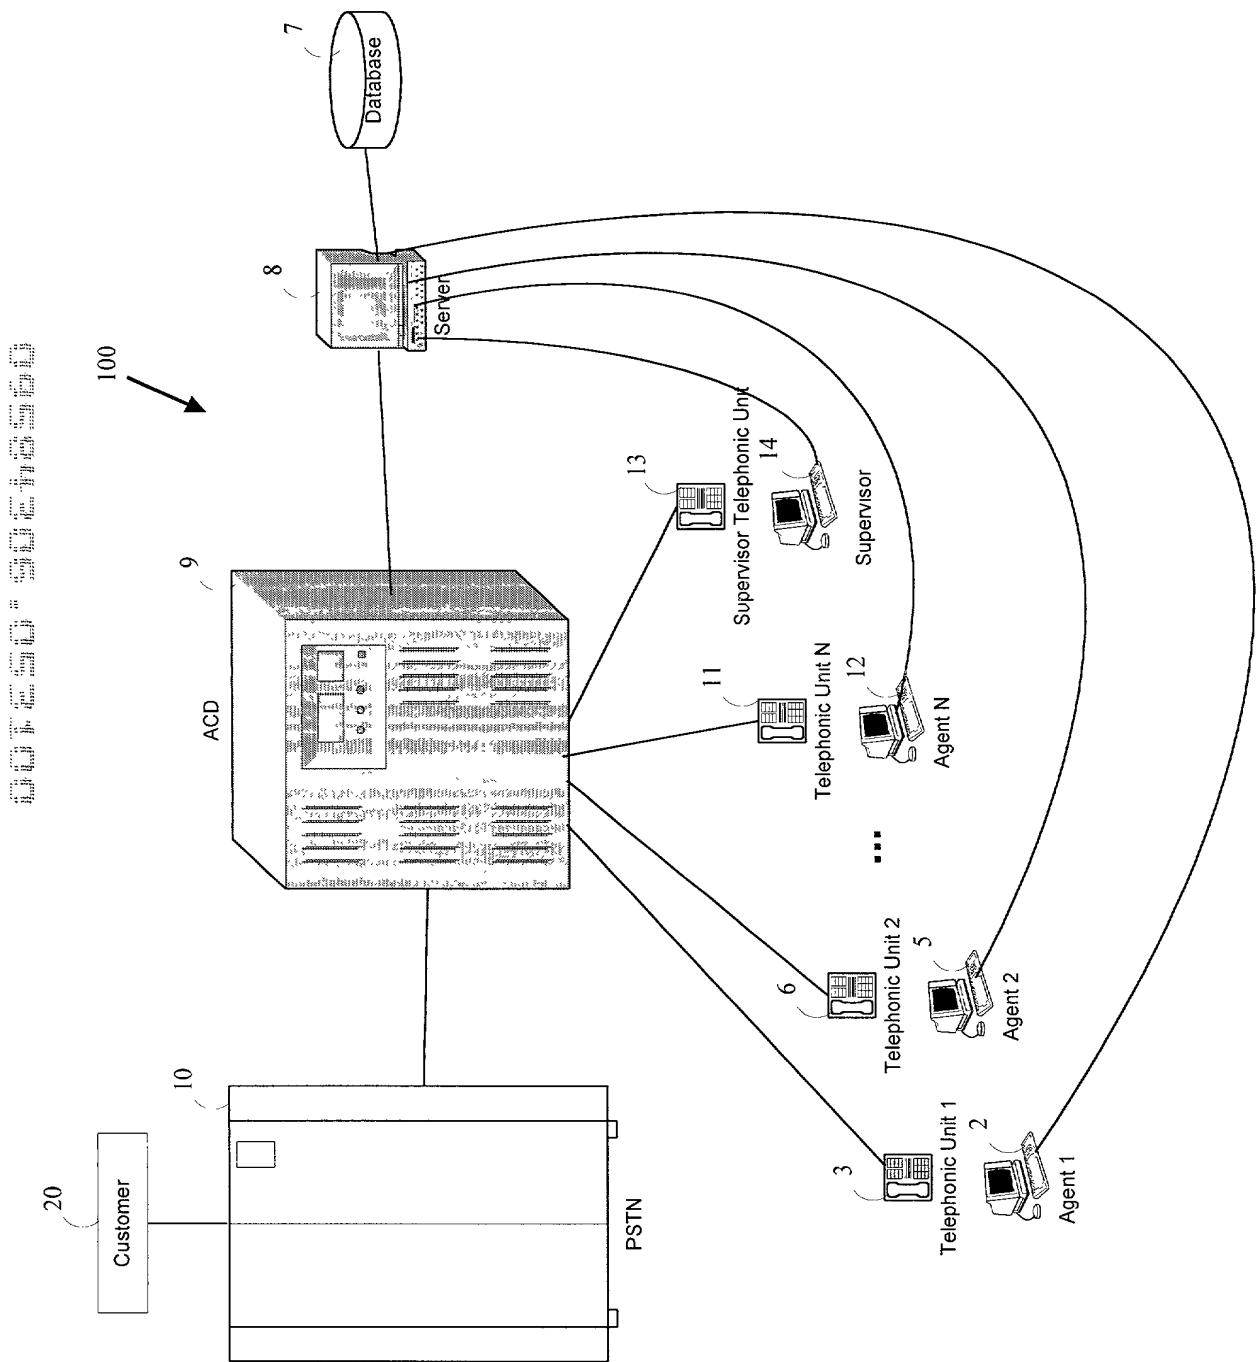


FIG. 1

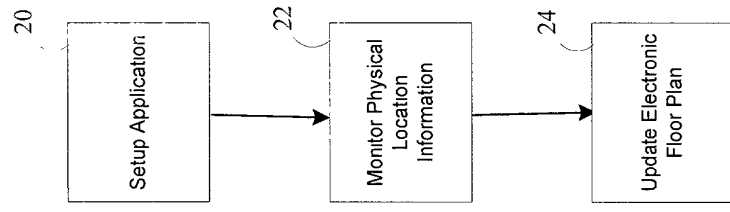


FIG. 2

FIG. 3

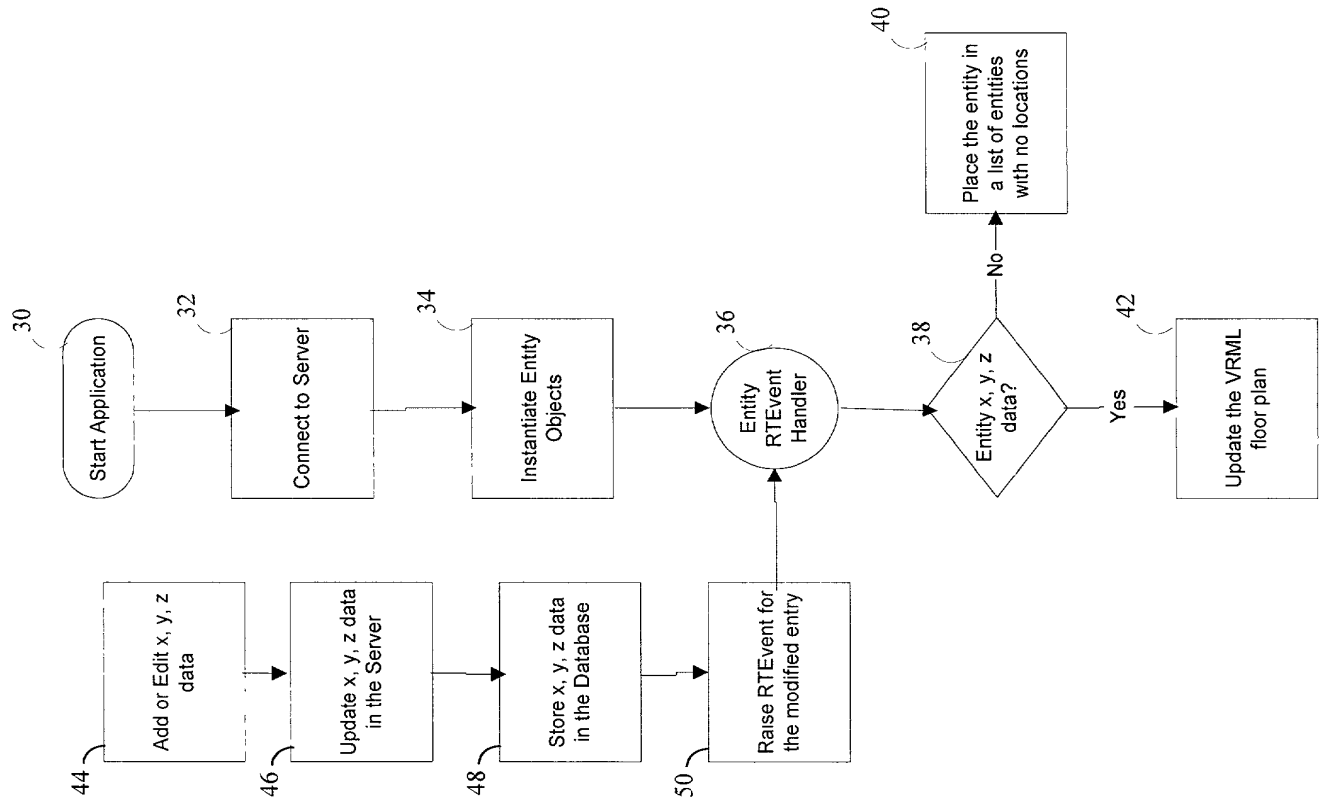


FIG. 4


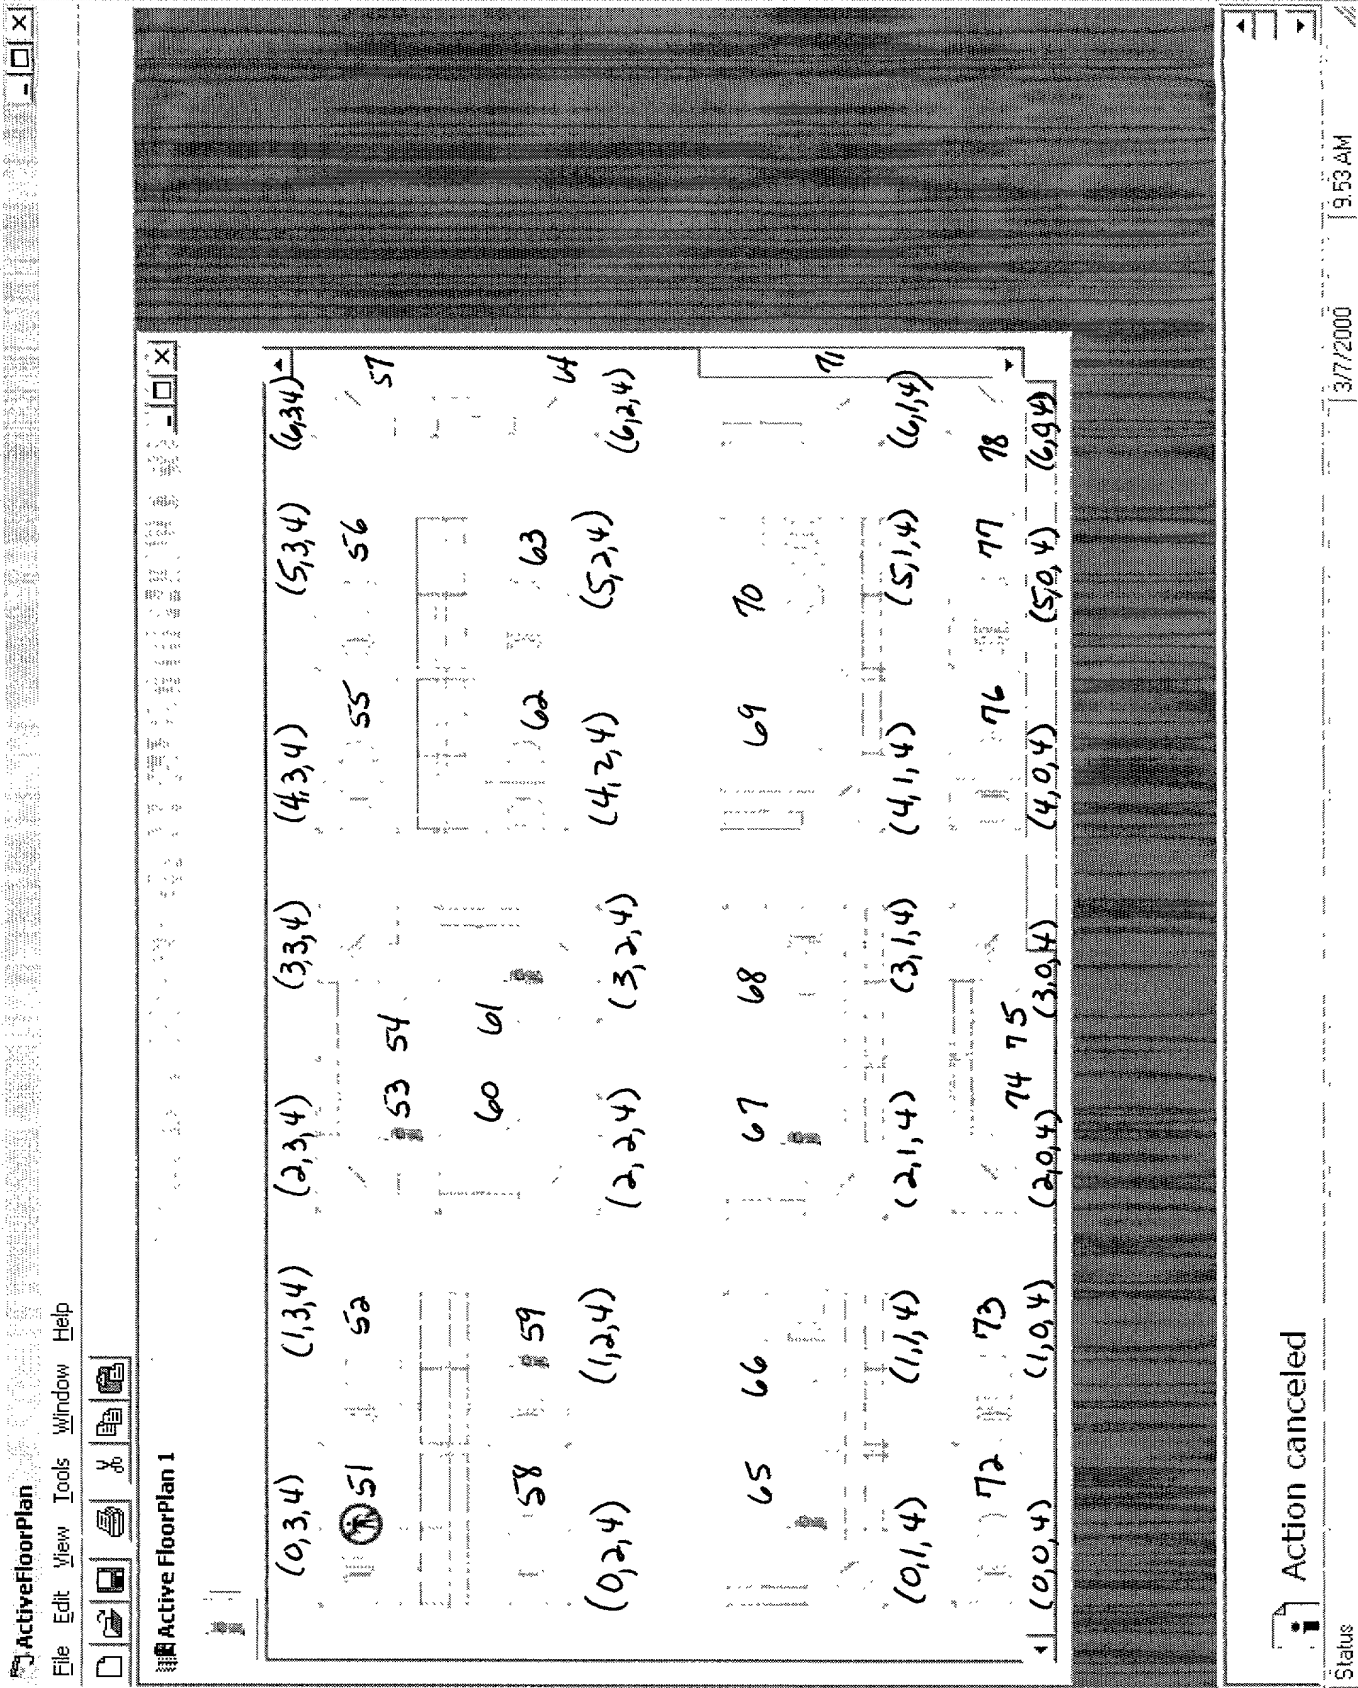


FIG. 5

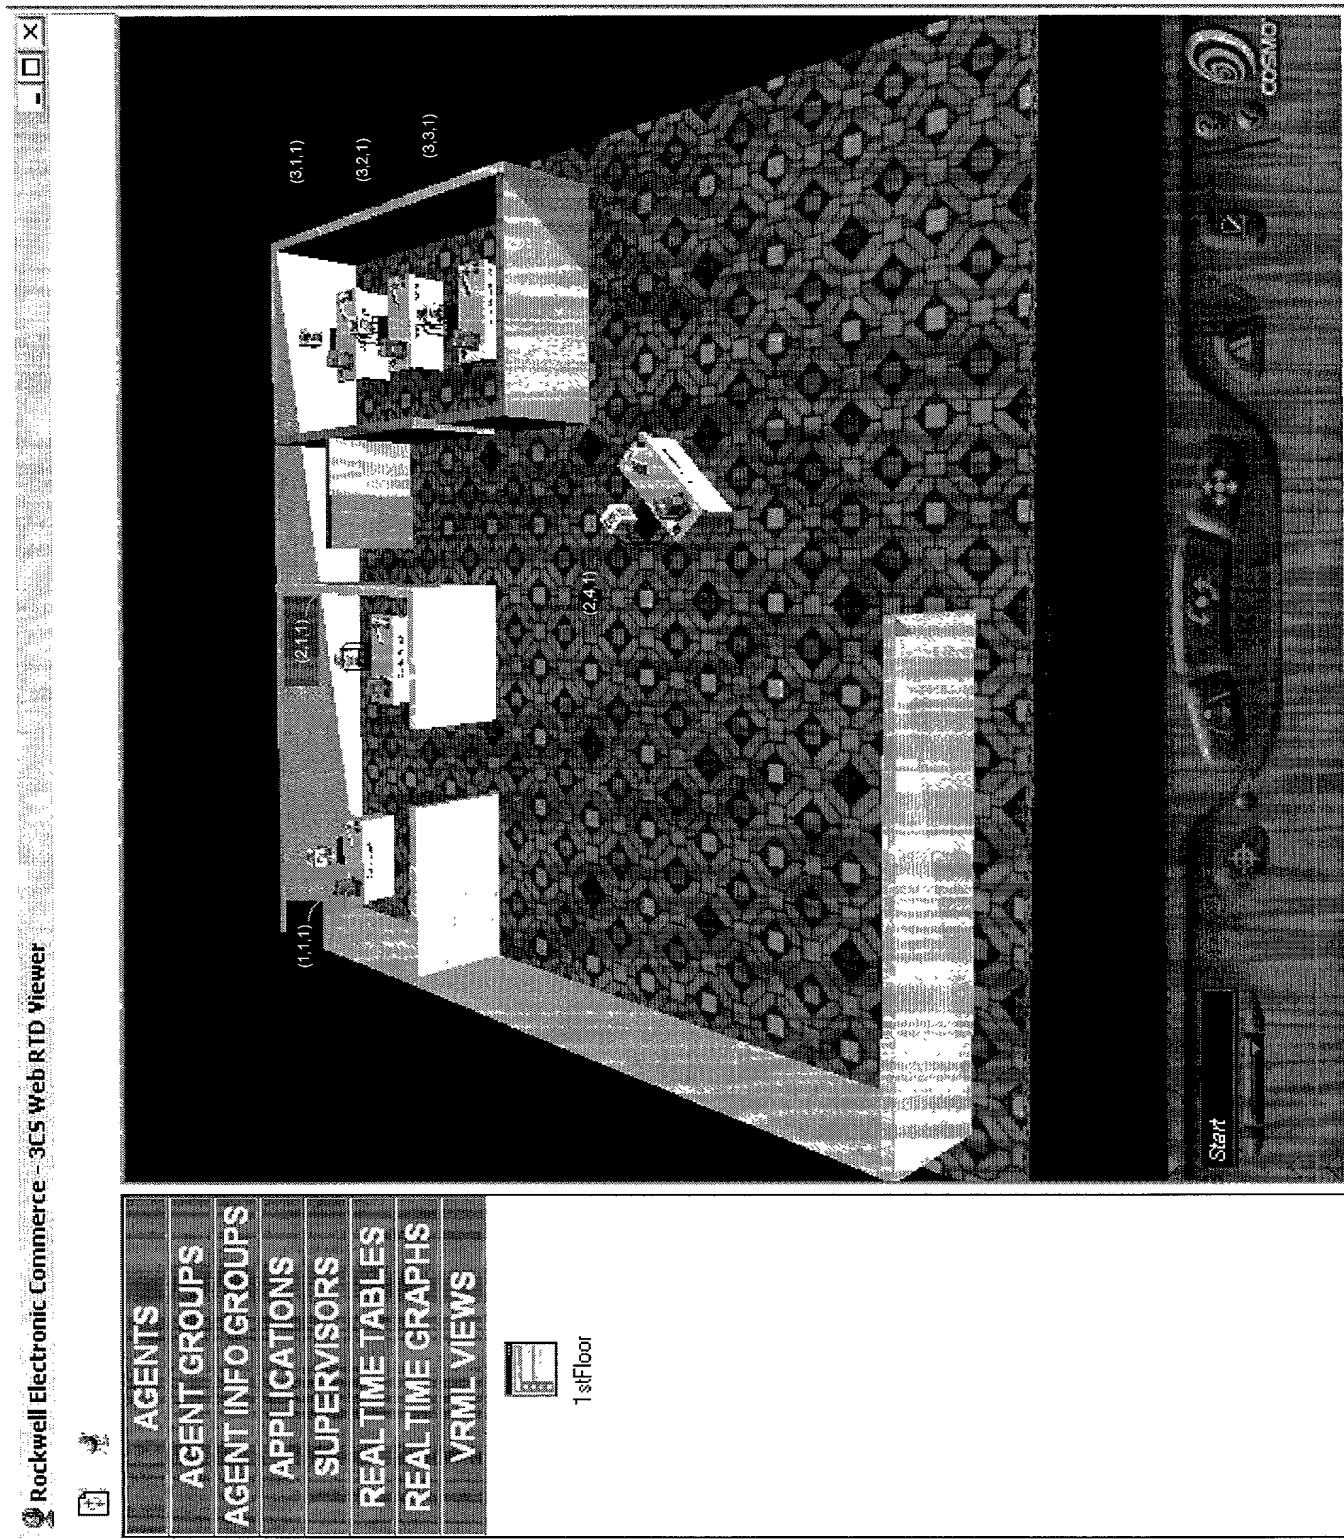

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare:

That my residence, post office address and citizenship are as stated below next to my name.

That I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SYSTEM AND METHOD FOR AUTOMATICALLY
MONITORING AND DISPLAYING ENTITY PHYSICAL
LOCATION INFORMATION IN A CALL CENTER**

That I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

That I acknowledge the duty to disclose information to be material to patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

That I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s) None

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
----------------------	---------------

(Application Number)	(Filing Date)
----------------------	---------------

That I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

United States Application(s)

(Application Serial No.)	(Filing Date)	(Status)-(Patented, pending, abandoned)
--------------------------	---------------	---

(Application Serial No.)	(Filing Date)	(Status)-(Patented, pending, abandoned)
--------------------------	---------------	---


That all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

I hereby appoint the following attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith and request that all correspondence and telephone calls in respect to this application be directed to WELSH & KATZ, LTD., 120 South Riverside Plaza, 22nd Floor, Chicago, Illinois 60606, Telephone No. (312) 655-1500.

<u>Attorney</u>	<u>Registration No.</u>
A. Sidney Katz	24,003
Richard L. Wood	22,839
Jerold B. Schnayer	28,903
Eric C. Cohen	27,429
Joseph R. Marcus	25,060
Gerald S. Schur	22,053
Gerald T. Shekleton	27,466
James A. Scheer	29,434
Daniel R. Cherry	29,054
Edward P. Gamson	29,381
Kathleen A. Rheintgen	34,044
Thomas W. Tolpin	27,600
Eric D. Cohen	38,110
Jon P. Christensen	34,137
Walter J. Kawula, Jr.	39,724
Leonard Friedman	37,135
Philip D. Segrest	39,021
Jeffrey W. Salmon	37,435
Mitchell J. Weinstein	37,963
Indira Saladi	45,759

Full name of sole or one joint inventor:

Eric James


Inventor's signature

MAY 25, 2000
Date

Residence and Post Office Address:

2384 Coral Cove
Elgin, IL 60123

Citizenship:

U.S.A.

Address for Correspondence:

WELSH & KATZ, LTD.
120 South Riverside Plaza
22nd Floor
Chicago, Illinois 60606